IMPORTANT SAFETY INSTRUCTIONS VM923 through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product. oaby unit's base When using your equipment, basic safety precautions 19. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may should always be followed to reduce the risk of fire, 2.8" Pan & Tilt electric shoćk and injury, including the following: Follow all warnings and instructions marked on the Video Baby Monitor expose you to dangerous voltages or other risks incorrect reassembling can cause electric shock when the product is subsequently used. Adult setup is required **CAUTION:** Do not install the baby unit at a height above 2 metres. 20. You should test the sound reception every time you turn on the units or move one of the components. 4. This product is not a substitute for adult supervision of the Inis product is not a substitute for adult supervision of the infant. Supervising the infant is the responsibility of the parent or carer. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby. Periodically examine all components for damage. There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use it for some time. Do not use this product near water, for example, near to a bath, sink, swimming pool or shower 6. CAUTION: Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery into fire or a hot oven, or mechanically crushing or cutting or the battery can result in an explosion. Leaving the battery in thigh temperature surrounding environment ome time. Children should be supervised to ensure that they do not play with the product. 24. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. In expression result in an explosion. Leaving the bartery in an extremely high temperature surrouncing environment can result in an explosion or the leakage of flammable liquid of gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in The RBRC seal. SAVE THESE INSTRUCTIONS Cautions Use only the adaptors included with this product. Incorrect adaptor polarity or voltage can seriously damage the product. Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source. 8. Use only adaptors and battery listed below Parent unit output: SV DC 1A VTech Telecommunications Ltd. Model: VT05EUK05100 (UK) 3. Batteries should not be exposed to excessive heat such s bright sunshine or fire. Warning-Strangulation Hazard-Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 0.9m away). Do not remove this tag. Never place the baby unit(s) inside the baby unit(s) inside the Baby unit output: 5V DC 1A VTech Telecommunications Ltc Model: VT05EUK05100 (UK) And a chargeable battery information: Zhuhai Great Power Energy Co., Ltd. Li-ion battery, 3.6V, 2600mAh, 9.36Wh; Model: ICR18650-2.6Ah-3.6V-1S1P Never place the baby unit(s) inside the baby 's cot or playpen. Never cover the baby unit(s) or parent unit with anything such as a towel or a blanket. Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a celling, under-the-table or cabinet outlet. elephones, intercoms, room monitors, televisions, oersonal computers, kitchen appliances and For pluggable equipment, the socket-outlet should be installed near the equipment and should be easily ordless telephones. Precautions for users of implanted cardiac pacemakers accessible. Cardiac pacemakers (applies only to digital cordless Unplug this product from the wall outlet before cleaning Do not use liquid or aerosol cleaners. Use a damp cloth devices): Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians or cleaning. Do not cut off the power adaptors to replace them with other plugs, as this causes a hazardous situation. Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on a crimped. Pacemaker patients Should keep wireless devices at least six inches from the pacemaker

- 14. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
 15. Do not overload wall outlets or use an extension cord.
 16. Do not place this product on an unstable table shelf.
- 16. Do not place this product on an unstable table, shelf, stand or other unstable surfaces. 17. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these
- ppenings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat

3. Press \blacktriangle or \triangledown to select the desired volume level, then press **SELECT** to confirm your selection.

confirm your selection.



OVERVIEW - PARENT UNIT

Ē

PEWER DAX 4) 🗘 🌡 🕲 🎵 🖸

Talk to your baby unit

Use the menu

unit's sound sensitivity.

• Press *d* or *b* to scroll among the

Press ▲ or ▼ to select an item.

• Press **SELECT** to confirm your

and return to live view.


Press TALK/EXIT to exit the menu

While in the menu:


menu options.

selection.

Press and hold **TALK** and speak to your parent unit. Your voice is transmitted to the baby unit. Release **TALK** when done talking and hear your baby again.









40 0 8 0 13

Press **POWER/LCD OFF** to switch off the screen. You can still hear sounds from the baby unit.



尝Tip • Press any key on the parent unit to turn the screen on again.



- Use and store the product at a temperature between 0°C and 40°C .

Should NOT place wireless devices directly over the

pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with bacemakers from other persons using wireless devices.

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence







Quick start guide

	subject to change without notice. comunications Ltd. 107/21. VM923_Pla2Y5matt_EN_QSG_V2
Power requiremente	Parent unit: 3.6V, 2600mAh, 9.36Wh Li-ion battery Parent unit power adaptor: Output: 5V DC © 1A Baby unit power adaptor: Output: 5V DC © 1A
Nominal effective range	Actual operating range may vary according to environmental conditions at the time of use.
rcd	2.8" Color LCD (QVGA 320x240) المزادة (Iexiq 04x240)
slənned⊃	32
γɔnəupərt timɛnɛıT	Bary unit: 2405 - 2475 MHz Parent unit: 2405 - 2475 MHz Wm00D WEL: 0.1W (20mW)
Frequency control	Crystal controlled PLL synthesizer


Submenu

Main menu

TECHNICAL SPECIFICATIONS


Adjust parent unit speaker volume






1X (Zoom out), then press SELECT to







Battery LED light

MENU/SELECT

- 3-level sound indicator light 6 Arrow Keys

 - 8
- LINK LED light TALK/EXIT
 - Microphone



9














- built-in.
- product.

- children.

- 2. Press \blacktriangleleft or \triangleright to choose \heartsuit . 3. Press **SELECT** to choose 🔑.












MENU SELECT

WHAT'S IN THE BOX

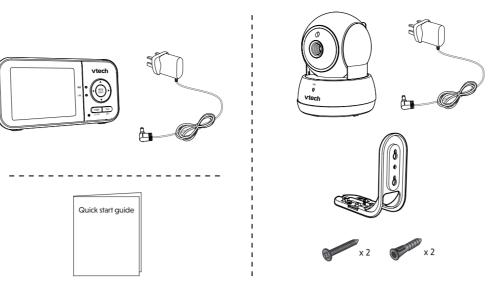

CONNECT THE BABY MONITOR

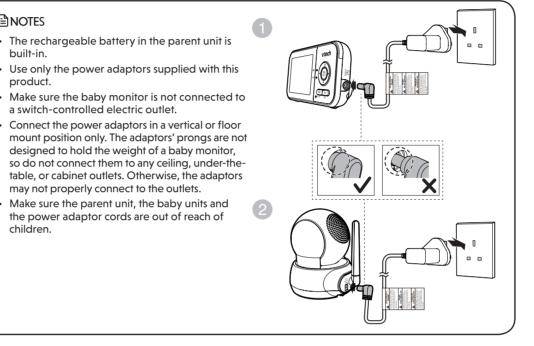



CONNECT THE BABY MONITOR (CONT'D)

Charge the parent unit battery


When you have connected and turned on the parent unit, the battery charges automatically NOTES

- Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. When the parent unit battery is fully charged, the battery icon becomes solid 💷 .
- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the battery.

The battery icon indicates the battery status (see the following table).

BATTERY INDICATORS	BATTERY STATUS	Αςτιον
The screen displays 🛄. The 💷 light flashes.	The battery has very little power and may only be used for a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid 🛄 .	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.


(2)POWER ON OR OFF THE BABY MONITOR

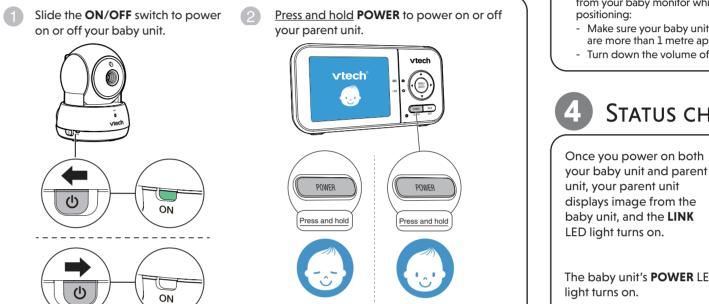

Power off

Power on

Overview - Baby unit

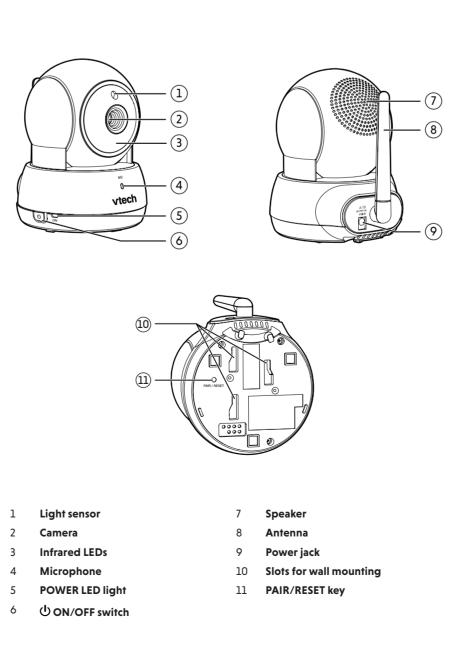


PARENT UNIT ICONS

	Status icons		
			Sub-menu icons _ 1ain menu icons _
Status	icons	Main mer	
Yull	 Connection status Yull or Yul displays when strong signal strength is detected between the baby unit and the parent unit. Yu or Yu displays when moderate or low signal strength is detected between the baby unit and the parent unit. 	Main Sub-me menu Volume	Parent unit s Adjust the
21	Current view statusDisplays the baby unit number of the baby unit being viewed.		 Adjust the
ø	ZoomDisplays when the current image on the parent unit has been zoomed in.	Settings	
*)	 Night vision Displays when the baby unit being viewed has activated the night vision feature. 	Q ,9	1X 2X Zoom
Q	TalkbackDisplays when the parent unit is talking to the baby unit.		• Zoom ir
1	LullabyDisplays when a lullaby is playing.		 Screen of The paramount
ġ.	Night lightDisplays when the baby unit's night light is turned on.	Ó	Brightnes
٩x	 Mute alert Displays when the parent unit speaker volume is set to zero. Displays when the parent unit is talking to the baby unit. 		 Adjust t
•F or	Real-time temperature	Temperature	
°C or	 Displays the real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. 57 °F or 14 °C). 		• Turn on/of
	Battery status • ▷ ○ → ○ → ○ → ○ → ○ → □ animates when the battery is charging.		 Set the par baby unit f
	 Image: displays solid when the battery is fully charged. Image: displays when the battery is low and needs charging. 	10	
		L °c F	Set the mir
			 Set tempe

B POSITIONING THE BABY MONITOR

• Keep the baby unit out of the reach of your baby. Never place or mount the baby unit inside the

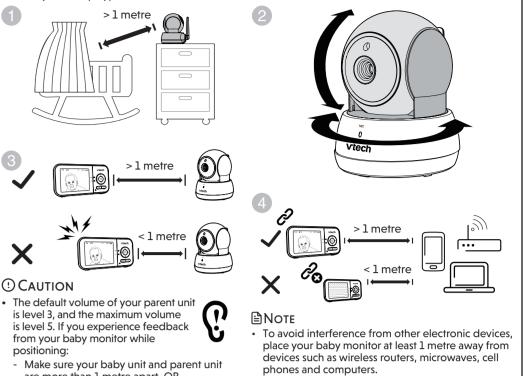


are more than 1 metre apart, OR Turn down the volume of your parent unit.


4 STATUS CHECK

! CAUTION

CAUTION

baby's cot or playpen.

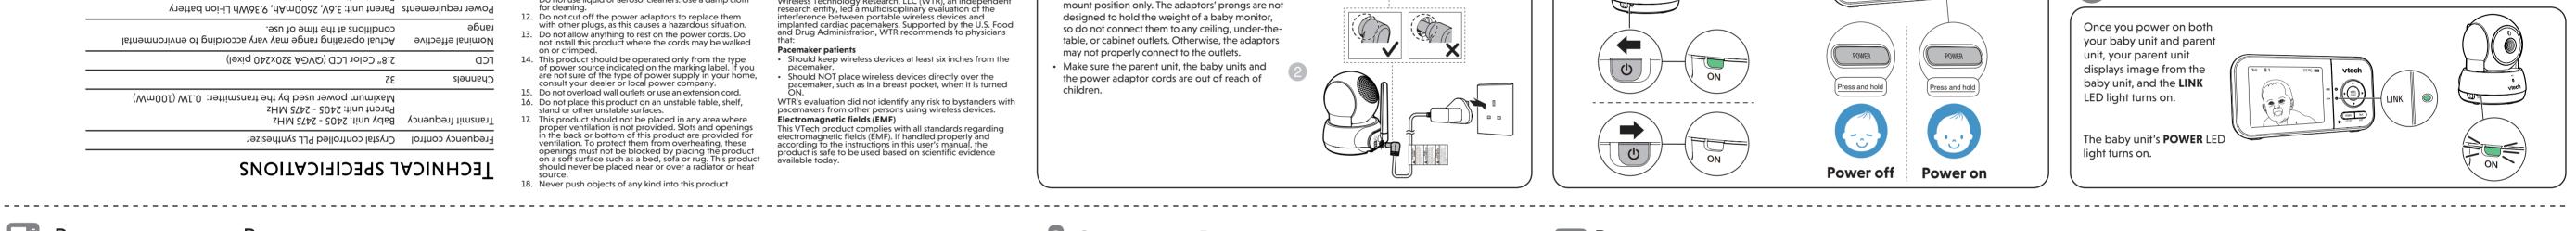



peaker volume

parent unit's speaker volume.

n and out of the video displayed from the baby unit.

30 60 min min

ff timer rent unit display will turn off to conserve energy after your chosen t of time inactive.


the parent unit's LCD screen brightness level.

off temperature alert tone.

rent unit to beep whenever the room temperature detected by the falls outside of the set temperature range.

nimum/maximum temperature.

erature display in Fahrenheit (°F) or Celsius (°C).

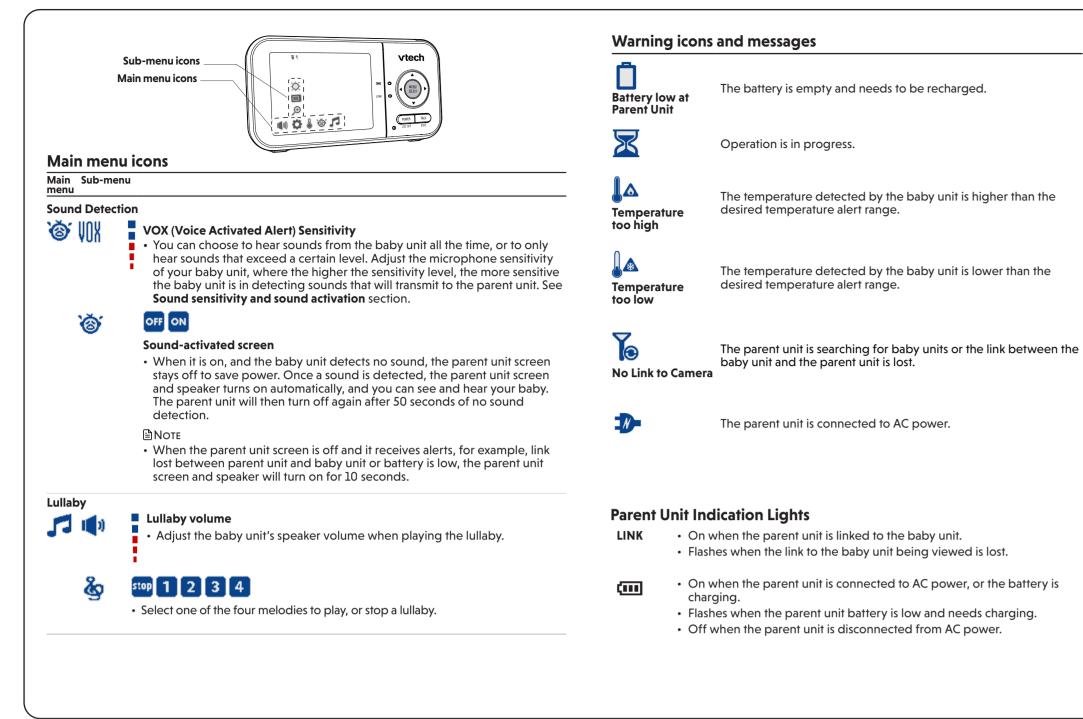

^Q_{∞∆} Frequently asked questions

Why does the	Try the following (in the order listed) for a common cure:
baby monitor	1. Disconnect the power to the baby units and the parent unit.
ot respond	2. Wait a few seconds before connecting power back to the baby units and the parent unit.
ormally?	3. Turn on the baby units and the parent unit.
	4. Wait for the parent unit to synchronize with the baby units. Allow up to one minute for this to take place.
Why doesn't the baby unit and parent unit power-on light illuminate when the units are switched on?	Perhaps the parent unit is not connected to power. Insert the appliance plug into the parent unit and insert the adaptor in a wall socket. Then, <u>press and hold</u> POWER to switch on the parent unit and to establish connection with the baby unit.
	Perhaps the baby unit is not connected to power. Insert the appliance plug into the baby unit and insert the adaptor in a wall socket. Then, slide the UON/OFF switch to ON to switch on the baby unit and to establish connection with the parent unit.
Why doesn't my parent	Make sure the power is not controlled by an electronic wall switch.
unit charge while connected to AC power?	You may have used the battery for a long time. See Warranty for repair/replacement.
Why is my screen in black and white?	The screen is in black and white during night-time or in a dark room when the night vision feature is activated. This is normal.
Why do I get glare or olurry display on my creen when viewing my oaby at night?	During night-time or in a dark room, the surrounding and other interfering factors, like lighting, objects, colors and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher elevation to prevent glare and blurry displays.
Why does the baby nonitor produce eedback?	 The parent unit and baby units may be too close to each other. Move the parent unit away from the baby units until the noise stops; OR Turn down the volume of your parent unit.
Why does the parent unit beep?	The baby unit may be out of range. Move the parent unit closer to the baby unit (but not less than 1 metre).
	The parent unit may not have enough battery for the parent unit to perform normally. Charge the battery in the parent unit until the battery icon becomes solid IIII.
	The temperature of your baby's room may be too high or too low.
Why does the parent unit react too quickly to other sounds?	The baby unit also picks up other sounds than those of your baby. Adjust the VOX sensitivity level to a lower level or lower the parent unit speaker volume. See Adjust the sound sensitivity of the baby unit .
Why don't I hear a sound/Why can't I hear	The parent unit speaker volume may be too low. See Adjust parent unit speaker volume to increase the volume.
ny baby cry?	You may have set a low VOX sensitivity level. See Adjust the sound sensitivity of the baby unit to set to a higher level.
Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound interruptions?	The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 1 metre).
	Other electronic products and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as possible.

CUSTOMER SERVICE AND PRODUCT WARRANTY



PRODUCT REGISTRATION Visit www.vtech.co.uk/clubvtech/login to register your VTech product

By joining the VTech Club you can also enter competitions, find out about news and events, seek expert advice for parents and let your kids play fun learning games and activities.

PRODUCT WARRANTY

ONE YEAR Thank you for choosing this quality product from VTech. We hope it will bring many hours of entertainment imaginative play and learning.

. The product detailed above is covered by a one year warranty from the date of purchas against any defects in materials or workmanship. 2. The product may be returned to the place of purchase. Alternatively the product can be

returned to VTech Electronics Europe PIc (see address below), with proof of purchase without proof of purchase no replacement will be provided. . VTech Electronics Europe Plc will examine the product and if it is found to be defective due to faulty materials or workmanship, will replace the product at their discretion

- 4. If the product covered by this warranty is damaged due to misuse, modification of unauthorized repair, or because of faulty batteries, battery discharge or incorrect electrical connections, then this warranty becomes void. 5. This warranty is personal to the original purchaser and is not transferable
- 6. Breakages to the LCD screen are not covered by the warranty.
- Returns to VTech Electronics Europe Plc should include a cheque or postal order fo $\pounds1.50$ towards the cost of return postage and packaging. 8. Products returned to VTech Electronics Europe Plc. should be addressed as follows and Products refulling to view lever the structure of the structure addressed as bollows and packed carefully to avoid damage in transit (Please do not include batteries or adaptor Please include details of the fault together with your name and address.
- . To keep an online record of your warranty, please register your product online at www.vtech.co.uk/clubvtech
- VTech Electronics Europe Plc, c/o XPO Logistics, Warehouse 350, Cat & Fiddle Lane, West Hallam, DE7 6HE THIS WARRANTY IS OFFERED AS AN EXTRA BENEFIT AND DOES NOT AFFECT
- CONSUMERS' STATUTORY RIGHTS

This warranty is valid for the UK and Eire only. For products purchased outside UK and Eire, please contact your local distributor or place of purchase

IMPORTANT

Please retain this booklet with your sales receipt as proof of the date of purchase.

Customer Service

Please call our Consumer Services Department on 03306 780149 (from UK) or +44 3306 780149 (outside UK) and a service representative will be happy to help you.



Importer: VTech Electronics Europe Plc. Napier Court, Abingdon Science Park, Abingdon, Oxon, OX14 3YT.





You can choose to hear sounds from the baby unit all the time, or to only hear sounds that exceed a certain level. Use the parent unit to adjust the baby unit's microphone sensitivity. The higher the sensitivity level, the more sensitive the baby unit will be in detecting sounds that transmit to the parent unit. The VOX sensitivity level is preset to the highest level.

Sound sensitivity and sound activation


Adjust the sound sensitivity of the baby unit



τινιτγ	Highest	High	Medium	Low	Lowest
RIPTION	The parent unit speaker is constantly on, and you will hear all sounds (including background noises) from your baby's room.	The parent unit speaker turns on for soft babbling and louder sounds from your baby. It remains quiet when your baby sleeps soundly.	The parent unit speaker turns on for loud babbling and louder sounds from your baby. It remains quiet when your baby makes soft sounds.	The parent unit speaker turns on for crying and louder sounds from your baby. It remains quiet when your baby makes soft sounds.	The parent unit speaker turns on for loud crying or screeching sounds from your baby. It remains quiet when your baby makes soft sounds.

Sound activated screen

With sound activation turned on, the parent unit screen stays off to save power when the baby unit detects no sound. Once the baby unit detects sounds that are louder than the chosen sound sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds of no sound detection.

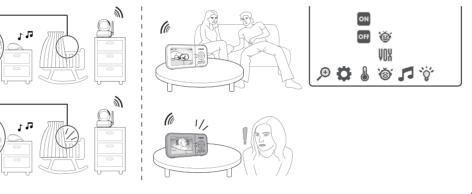

DECLARATION OF CONFORMITY

This product is intended for use within Europe and UK.

This equipment complies with the essential requirements to EU's Radio Equipment Directive (2014/53/EU) and the UK's Radio Regulations 2017 on radio systems and telecommunication

VTech Telecommunications Ltd. hereby declares that 2.8" Pan & Tilt Video Baby Monitor VM923 is in compliance with the essential requirements and other relevant provisions of EU's Radio Equipment Directive (2014/53/EU) and UK's Radio Equipment Regulations 2017. The Declaration of Conformity for the VM923 is available from http://www.vtech.com/rtte-directive.


DISPOSAL OF BATTERIES AND PRODUCT

- The crossed-out wheelie bin symbols on products and batteries, or on their respective packaging indicates they must not be disposed of in domestic waste as they contain substances that can be damaging to the environment and human health.
- The chemical symbols Hq, Cd or Pb, where marked, indicate that the battery contains more than the specified value of mercury (Hg), cadmium (Cd) or lead (Pn) set out in Battery Directive (2006/66/EC).
- The solid bar indicates that the product was placed on the market after 13th August, 2005.
- Help protect the environment by disposing of your product or batteries responsibly.

The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license. The Crickets At Night sound file was created by Mike Koenig, and is used under the Creative Commons license. The Heart Beat sound file was created by Zarabadeu, and is used under the Creative Commons license.

Manufacturer: VTech Telecommunications Ltd. 23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.




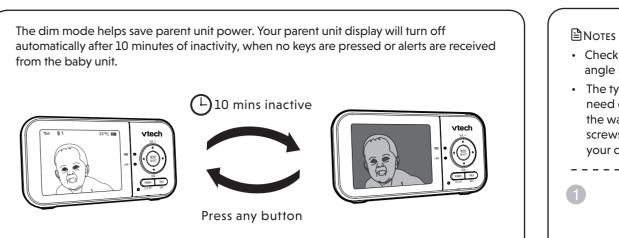

NOTE

• While the screen is turned off, any keypress or alert message will trigger the screen to return to the preset brightness level. After 10 minutes of inactivity, it will resume to dim mode.

NIGHT VISION

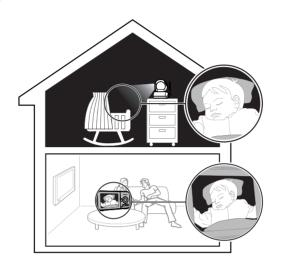

The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit being viewed detects low light levels, the infrared LEDs are switched on automatically. The images from the baby unit are in black and white, and 🥝 appears on the screen.

2


-OR-

🖹 Notes

- It is normal to see a short white glare on your parent unit screen as the baby unit is adapting to the dark environment.
- When the infrared LEDs are on, it is normal for the images to be in black and white.

尝TIP

at a higher elevation to prevent glare and a blurry display.

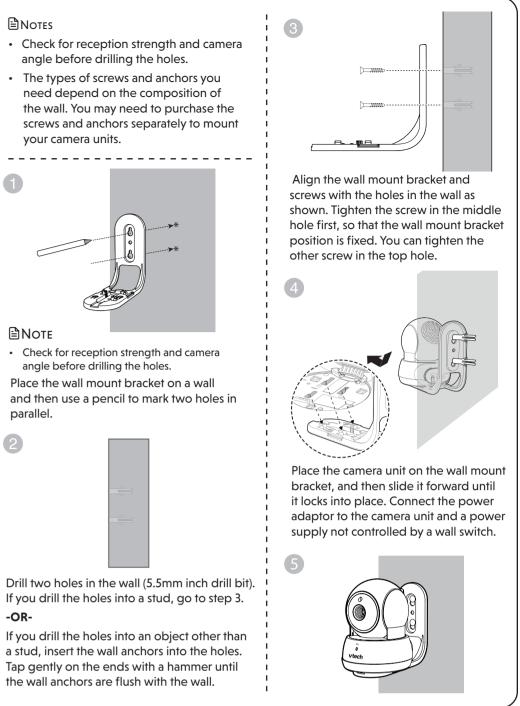

• Depending on the surrounding and other interfering factors, like lighting, objects, colours and backgrounds, the display resolution may vary. Adjust the baby unit angle or place the baby unit

GENERAL PRODUCT CARE

- To keep this product working well and looking good, follow these guidelines:
- Avoid placing it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
- DO NOT expose it to direct sunlight or moisture.
- Avoid dropping the product or treating it roughly.
- · Clean with a soft damp cloth.

UK

CA

- DO NOT immerse the parent unit and the baby unit in water and do not clean them under running water.
- DO NOT use cleaning spray or liquid cleaners.
- Make sure the baby unit and parent unit are dry before you connect them to the mains again.

STORAGE

When you are not going to use the baby monitor for some time, store the parent unit, the baby unit and the adaptors in a cool and dry place.

ADULT SUPERVISION

- This baby monitor should be for use by adults only.
- Do not place the baby unit inside the cot or playpen.
- For children's safety, touching and playing with the baby monitor and all the accessories are not recommended. THIS IS NOT A TOY.

A MOUNT THE BABY UNIT ON DRY WALL (OPTIONAL)